



**sroka**<sup>TM</sup>  
MATERIAL HANDLING

# RCB *TRUCKS*

**15,000 lbs - 120,000 lbs**

Hydrostatic Counterbalanced Truck  
LP.DIESEL.GAS MODELS



RCB-250L shown

## Standard Features

- Mill Duty, Welded Steel Chassis
- Dual Side Mounted LPG Tanks
- Complete Lighting Package
- Forks with Side Shift Function
- Diagnostic Instrument Panel
- Hydrostatic Drive Train
- Cushion or Solid Pneumatic Wheels
- GM Engines

## Benefits

- Low Maintenance
- Quiet Operation
- Unmatched Vehicle Quality
- Smooth Acceleration
- Versatile Application
- Compact Design
- Short Turning Radius
- Superior Operator Comfort




**Made in the U.S.A**

## RCB

### Overview

## Heavy Duty Trucks

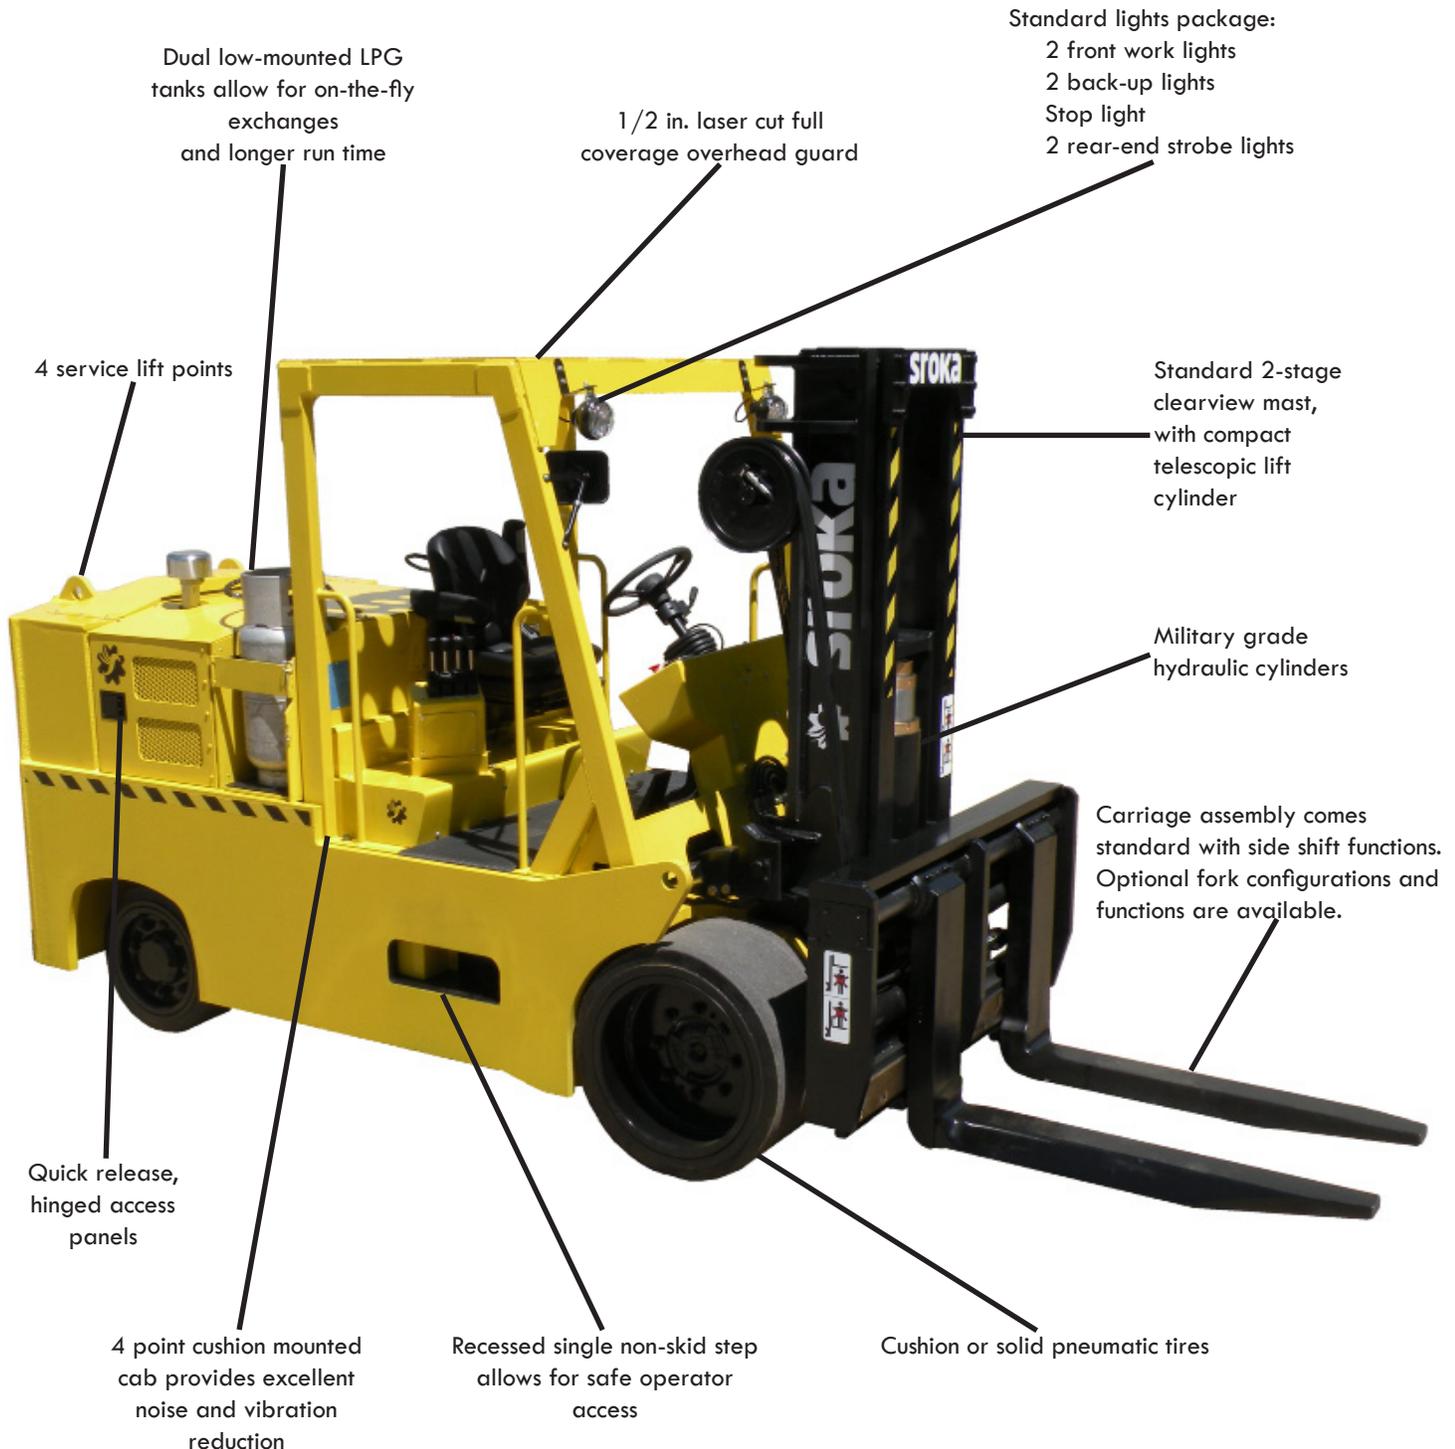

Mill Duty Welded Chassis | Axle-less Hydrostatic Drive



## Controls



Complete system performance display with diagnostics




Ergonomically placed, soft touch, controls for ultimate operator comfort

Comfort  
Efficiency  
Speed



Parking brake, low-fuel indicator, speed selector, dual fuel tank selector

SROKA  
Standard.

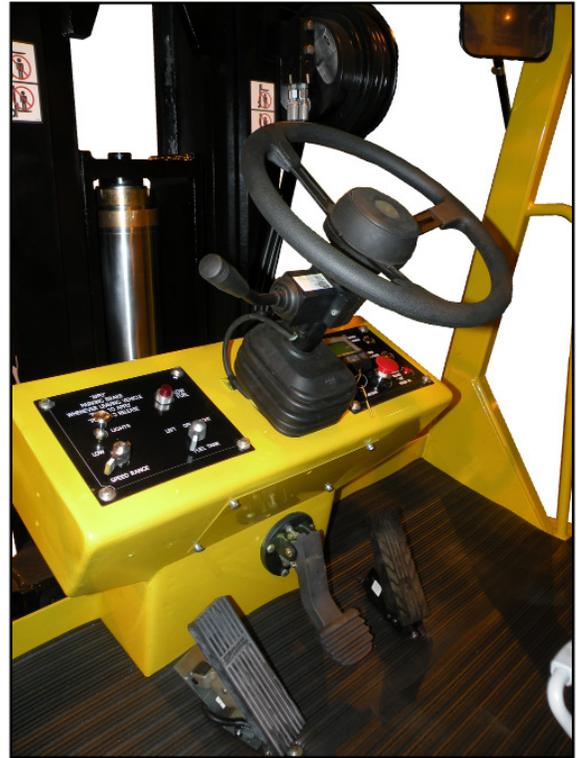

Heavy Duty Trucks

## Visibility

# 360° Panoramic Operator Visibility



- Benefits
- Dual **side** mounted LPG tanks
  - Optional seat location (left,center,right)
  - Higher operator position
  - Clearview mast
  - 2 rear-view mirrors
  - Low back-end



## RCB


### Operator Comfort

Heavy Duty Trucks





## Hydrostatic Drive Train

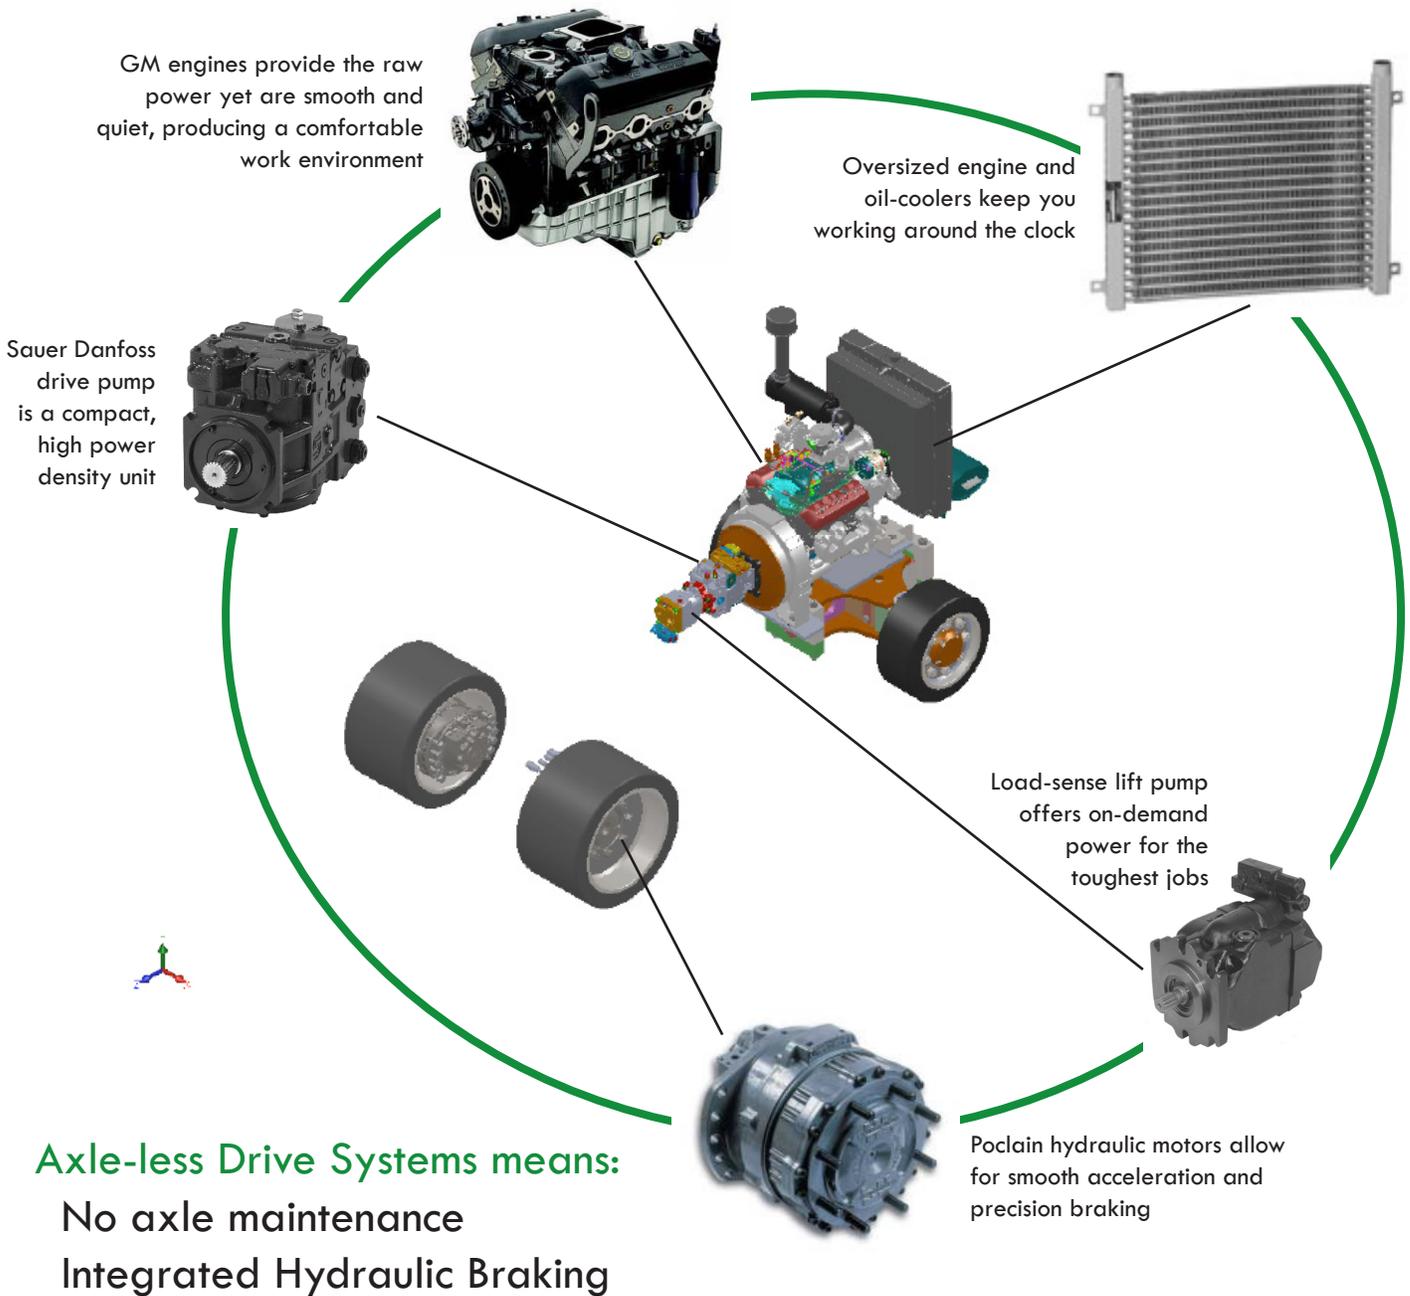

Heavy Duty Trucks


Reliable | Technologically Advanced | Lowest Maintenance



**15,000-120,000 lbs**  
**Capacities**

**RCB**

Dimensions

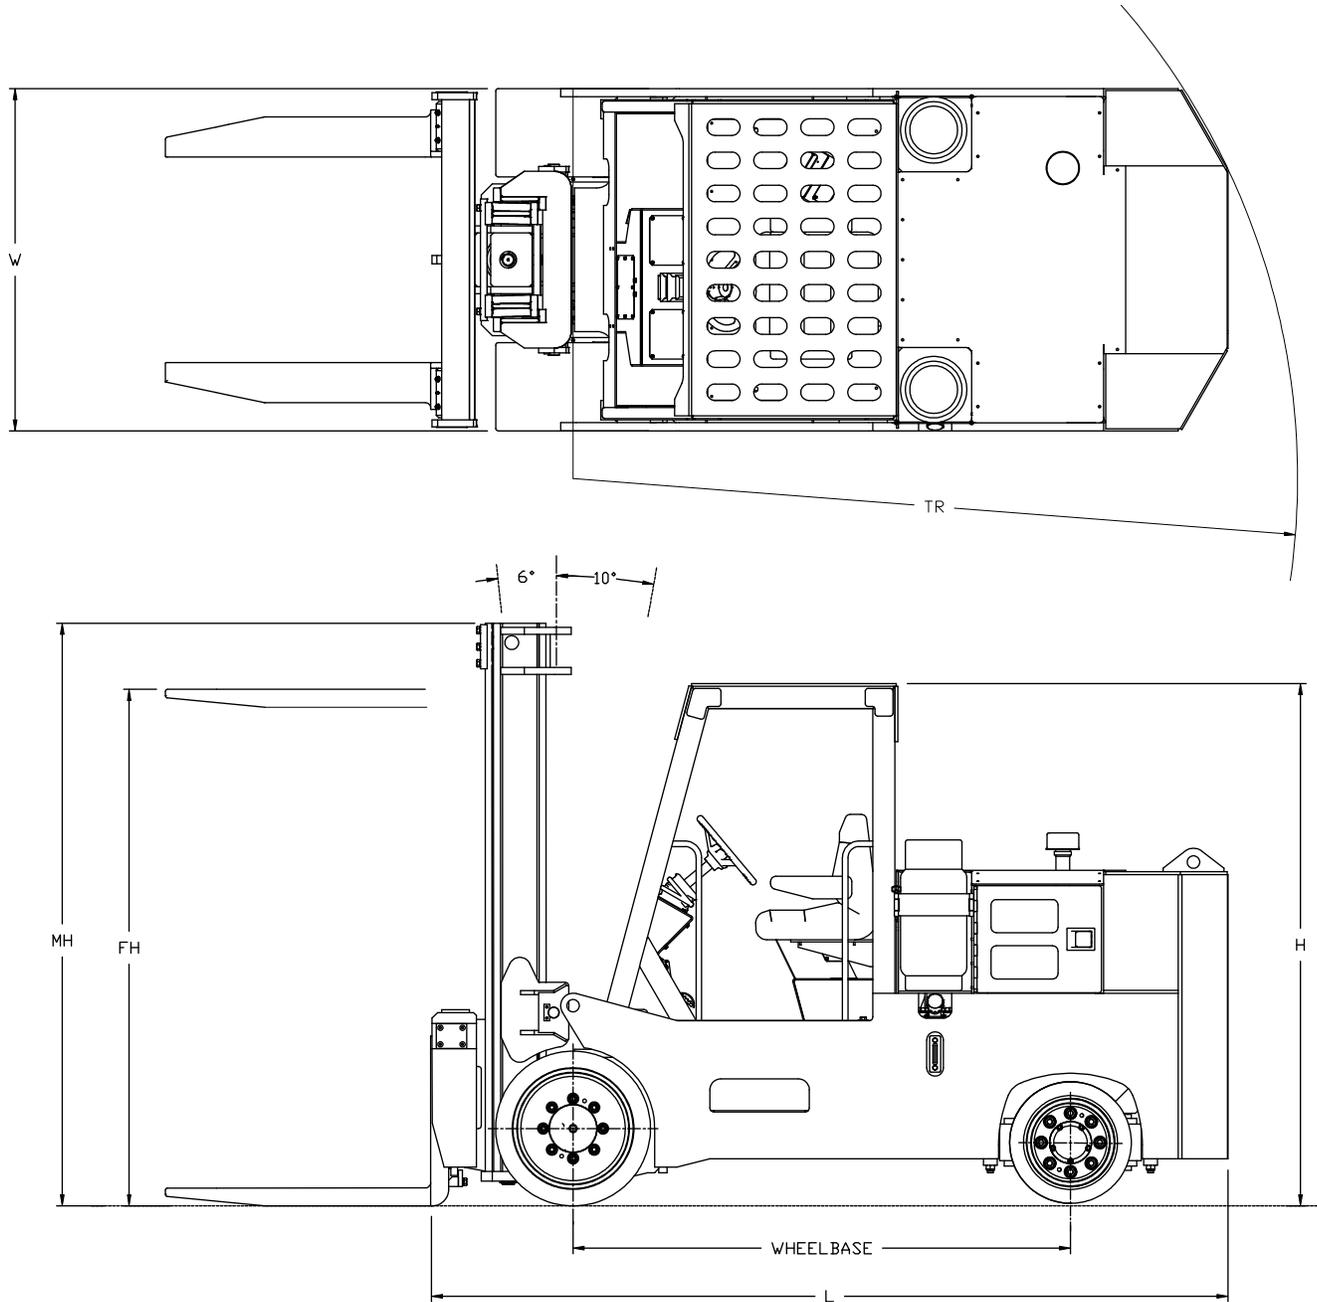

Heavy Duty Trucks



## Technical Specifications

			LCB-150-24	LCB-180-24	LCB-200-24	LCB-220-24	LCB-250-24	LCB-300-24
<b>Rated Load Capacity</b>		lb (kg)	15000 (6804)	18000 (8165)	20000 (9072)	22000 (9979)	25000 (11340)	30000 (13608)
<b>Load Center *</b>		in (mm)	24 (610)	24 (610)	24 (610)	24 (610)	24 (610)	24 (610)
<b>Overall Length to Fork Face</b>	L	in (mm)	134 (3404)	134 (3404)	134 (3404)	149 (3785)	149 (3785)	159 (4039)
<b>Truck Overall Width</b>	W	in (mm)	54 (1372)	54 (1372)	58 (1473)	58 (1473)	62 (1575)	62 (1575)
<b>Height of Overhead Guard</b>	H	in (mm)	95 (2413)	95 (2413)	95 (2413)	95 (2413)	95 (2413)	105 (2667)
<b>Minimum Turning Radius</b>	TR	in (mm)	115 (2921)	115 (2921)	115 (2921)	130 (3302)	130 (3302)	142 (3607)
<b>Travel Speed, Loaded</b>		mph (km/h)	8-9 (13-15)	8-9 (13-15)	8-9 (13-15)	8-9 (13-15)	8-9 (13-15)	8-9 (13-15)
<b>Lifting Speed, Loaded</b>		fpm (mm/s)	25 (127)	25 (127)	25 (127)	25 (127)	25 (127)	25 (127)
<b>Wheel Base</b>		in (mm)	75 (1905)	75 (1905)	75 (1905)	90 (2286)	90 (2286)	100 (2540)
<b>Engine Models</b>		Make/Displacement	GM 4.3L	GM 5.7L				
<b>Rated Power of Engine</b>		hp (kw)	105 (78)	105 (78)	105 (78)	105 (78)	105 (78)	150 (112)
<b>Max Torque</b>		lb-ft (kg-m) / rpm	220 (30) / 2400	220 (30) / 2400	220 (30) / 2400	220 (30) / 2400	220 (30) / 2400	309 (43) / 1400
<b>Mast Height (Duplex)</b>	MH	in (mm)	95 (2413)	95 (2413)	95 (2413)	95 (2413)	95 (2413)	95 (2413)
<b>Fork Height</b>	FH	in (mm)	110 (2794)	110 (2794)	105 (2667)	105 (2667)	105 (2667)	105 (2667)

			LCB-350-24	LCB-400-30	LCB-500-36	LCB-600-36	LCB-700-42
<b>Rated Load Capacity</b>		lb (kg)	35000 (15876)	40000 (18144)	50000 (22680)	60000 (27216)	70000 (31751)
<b>Load Center *</b>		in (mm)	24 (610)	30 (762)	36 (914)	36 (914)	42 (1067)
<b>Overall Length to Fork Face</b>	L	in (mm)	159 (4039)	164 (4166)	164 (4166)	184 (4674)	184 (4674)
<b>Truck Overall Width</b>	W	in (mm)	62 (1575)	70 (1778)	74 (1880)	74 (1880)	90 (2286)
<b>Height of Overhead Guard</b>	H	in (mm)	105 (2667)	105 (2667)	123 (3124)	123 (3124)	123 (3124)
<b>Minimum Turning Radius</b>	TR	in (mm)	142 (3607)	150 (3810)	156 (3962)	174 (4420)	176 (4470)
<b>Travel Speed, Loaded</b>		mph (km/h)	7-8 (11-13)	7-8 (11-13)	7-8 (11-13)	7-8 (11-13)	7-8 (11-13)
<b>Lifting Speed, Loaded</b>		fpm (mm/s)	25 (127)	25 (127)	25 (127)	25 (127)	25 (127)
<b>Wheel Base</b>		in (mm)	100 (2540)	105 (2667)	105 (2667)	125 (3175)	125 (3175)
<b>Engine Models</b>		Make/Displacement	GM 5.7L	GM 5.7L	GM 8.1L	GM 8.1L	GM 8.1L
<b>Rated Power of Engine</b>		hp (kw)	150 (112)	150 (112)	225 (168)	225 (168)	225 (168)
<b>Max Torque</b>		lb-ft (kg-m) / rpm	309 (43) / 1400	309 (43) / 1400	470 (65) / 2400	470 (65) / 2400	470 (65) / 2400
<b>Mast Height (Duplex)</b>	MH	in (mm)	105 (2667)	105 (2667)	123 (3124)	123 (3124) **	123 (3124) **
<b>Fork Height</b>	FH	in (mm)	105 (2667)	105 (2667)	120 (3048)	72 (1829)	65 (1651)

\* Other Load Center and Capacity Configurations Available

\*\* Single Mast Carriage

Heavy Duty Trucks

## Contact Manufacturer for Details


## Our Commitment to the End User

### Dealer Network

Sroka's commitment to only provide quality products and service is demonstrated in our extensive network of over 270 dealers. Guaranteeing timely field service and quality support for the entire lifetime of the vehicle.

### Genuine Parts

Use only Sroka Genuine Parts for long lasting performance. Sroka guarantees same day shipping on all in-stock items.

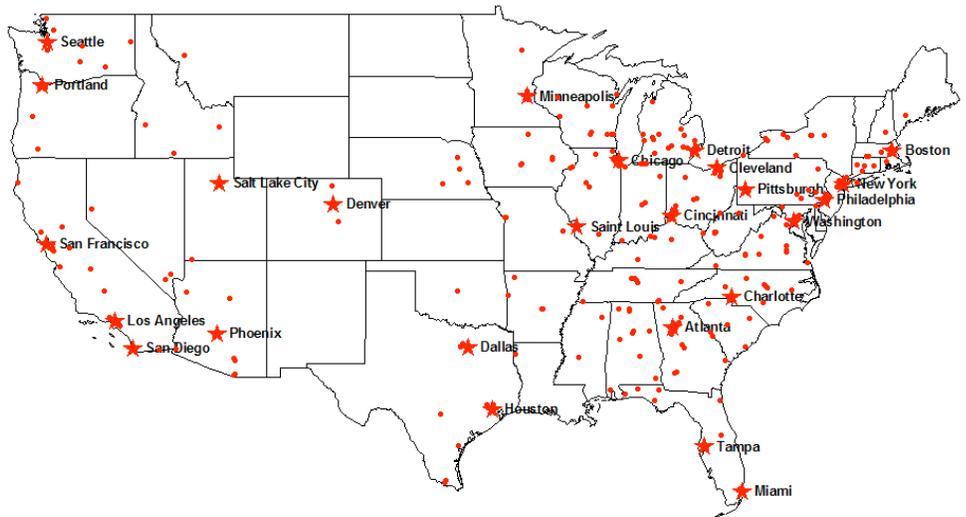

• Dealer Locations

Let us help you fulfill all of your material handling needs with products ranging from 3,000 to 500,000 pound capacities. Contact your local authorized dealer for information about the full family of Sroka products.



Experience the power and reliability of American made products.



Authorized Dealer Label



**Sroka Incorporated**  
Strongsville, OH 44149 USA  
[mail@srokausa.com](mailto:mail@srokausa.com)  
Tel 440.572.2811  
Fax 440.572.1525  
srokausa.com

Photos may or may not include optional features.

Note: Performances may vary due to motor and system efficiency tolerances. The performance depicted represents nominal values obtained under typical operating conditions. Sroka has a policy of continuing to improve its products; therefore materials, colors, equipment and specifications could change without notice.

Printed in the U.S.A